



Fishing Efficiency of LED Lamps for Fixed Lift Net Fisheries in Banten Bay Indonesia

Adi Susanto^{1,*}, Ririn Irnawati¹, Mustahal¹, Mohamad Ana Syabana²

¹ Sultan Ageng Tirtayasa University, Fisheries department, Faculty of Agriculture, Jl. Raya Jakarta Km. 4 Pakupatan Serang Banten 42188 Indonesia

² Sultan Ageng Tirtayasa University, Agroechotechnology department, Faculty of Agriculture, Jl. Raya Jakarta Km. 4 Pakupatan Serang Banten 14420 Indonesia

* Corresponding Author: Tel.: +62254 280330; Fax: +62254 281254;
E-mail: adisusanto@untirta.ac.id

Received 27 July 2016
Accepted 22 September 2016

Abstract

Fixed lift net fisheries in Banten Bay used compact fluorescent lamp (CFL) since the middle of 2000 for replacement the traditional pressured kerosene lantern. It was increased the light intensity, but this lamps consumed high energy and fuels. Application of light emitting diode (LED) is considered to energy saving and increased catches in lift net fisheries. The fishing trial was conducted on 22 May-16 June 2015 in Banten Bay Indonesia using 2 units of lift net with 6 units of CFL and LED respectively. The result shows both lamps did not have significant effect on total catches. Meanwhile, application of LED lamps has significant effect to main catch (anchovy). There were increasing catch weight of anchovy with mean 29.49%. LED also decreased of fuel consumption with mean saving 35.15%. It is evident enough to conclude that LED lamps have high efficiency and effectiveness for lift net fishing in Banten Bay.

Keywords: Anchovy, compact fluorescent lamp, light fishing, fuel consumption.

Introduction

Fishing with light is a successful of modern fishing technique that was used in Indonesia since 1950 in various fishing gears (Ben-Yami 1976). The light fishing gears in Indonesia dominated by lift net (bagan) and purse seine (Sudirman and Musbir, 2009). There are 2 types of bagan in Banten Bay Indonesia, fixed lift net as the small scale fisheries, and boat lift net as the thrive of light fishing activities. Bagan has used compact fluorescent lamp (CFL) as fishing lamps to attract photo taxis positive of fish schooling since 15 years ago. It replaced pressurized kerosene lanterns that were used by fishers before developing of gasoline generator as the electric power source. There are variety of light power (W), number of light units, and manufacture of CFL lamps used on bagan fisheries based on traditional knowledge and fishermen experience.

Fishing lamp is a key component for light fishing activities. The light sources of fishing lamps have developed from torch, acetylene, kerosene, incandescent, mercury, fluorescent, and halogen lamps to the metal halide (MH) lamps (Inada and Arimoto, 2007; Ben-Yami, 1976). Fishermen generally think that the catch of light fishing will increase with the rises of light power. However, there are many factors that affect fish attraction such as the

quality of light (e.g. wavelength), quantity of light (e.g. power), and arrangement of fishing lights. In addition, underwater illuminance, irradiance level and distribution created by these factors are influenced by the optical characteristics of seawater and influence to the fish behaviour (Arakawa *et al.*, 1998; Shikata *et al.*, 2011).

The scientific basis evident for selecting the appropriate of light source and its power as fishing lamps still remains unverified. Information about the relationship between fishing lights and fish behavior is still limited and consequently fishermen determine the type, number and power of fishing lights based on their personal experience (Yamashita *et al.*, 2012). Meanwhile, light source in fishing attraction by light, which mainly includes filament lamp, halogen tungsten lamp, mercury and metal halide, all belongs to thermal light source (Hua and Xing, 2013). The light from these lamps is omnidirectional and, therefore, most of it does not reach the target areas, such as the deck and the surrounding water (Lai *et al.*, 2015). Although these sources have improved light intensity, their main handicap is that these lamps consumed a great amount of electric energy and fuel (Kehayias *et al.*, 2016).

Compared with these conventional lamps, LED (light emitting diode) have many advantages, such as high efficiency, a long lifetime, fast response and

together with climate resistance (Lai *et al.*, 2015). Furthermore, LEDs, which do not contain mercury (as opposed to CFL), are tolerant of low voltages, very small and portable, and have high optical efficiency. LEDs are often submersible, and it can be compared favourably, technically and economically with all other forms of lighting for small-scale applications (McHenry *et al.*, 2014). Thus, LEDs have been considered the most promising new lighting solution for a fishing fleet.

The objective of this research is to compare and to analyse the effectiveness of LED lamps application by using catches and fuel consumption indicators. The results from this research can be considered to replace the traditional CFL lamps with LED fishing lamps that was more efficient and environmental friendly to promote sustainable fisheries at Bagan fishing in Banten Bay Indonesia.

Materials and Methods

Lift net fishing in Banten Bay used varies CFL lamps with ranged of output power between 24 W to 90 W per unit. In this research, we tried to introduce the new LED lamps and analysed the effectiveness of both lamps based on catch weight and fuel consumption. Light sources in this experiment are white LED lamps (Fujilight bulb 30 W, 2500 lumens) and white CFL lamps (Cahaya 4U model 90 W, 2400 lumens). These lamps were chosen based on several reasons. The CFL lamps are an existing light source that was used by local fishermen because low price,

easy to be obtained, and bright enough to attract fish schooling. Meanwhile, LED lamps have very long operating life, small, low energy consumption (Shen *et al.*, 2012; Matsushita and Yamashita, 2012; Hua and Xing, 2013) and they have similar lumens output with CFL lamps based on manufacture specification.

The CFL and LED lamps have different model and construction. They will affect to difference of light distribution of both lamps. To analyse the pattern of light distribution, we investigated the illuminance of both lamps in air and bottom of the sea water. Measurements of luminous intensity in air were performed in dark room at Fisheries Department Laboratory Sultan Ageng Tirtayasa University using digital lux meter (Lutron model LX-103 min scale 1 lx). The light intensity distributions were investigated by rotating sensor at every 10-degree with radius 1 m from the light source to the sensor (Wisudo *et al.*, 2002).

Fishing operation was conducted at 2 fixed lift net in Banten Bay with coordinate of LED and CFL lamps at 05°58'02"S; 106°09'40"E and 05°58'05"S; 106°09'58"E, respectively. The platform size of both bagan was 14 m length, 14 m breadth and 12 m depth. Its box-shaped net was 12 m length and 12 m breadth, with 3 mm mesh size of polyamide. Light illuminance of LED and CFL lamps at night in sea water was measured by underwater lux meter (LUW 1000D) at sea surface to 10 m depth during fishing operation. The measurements were conducted at the centre, middle and corner of platform with 1 m interval (Figure 1).

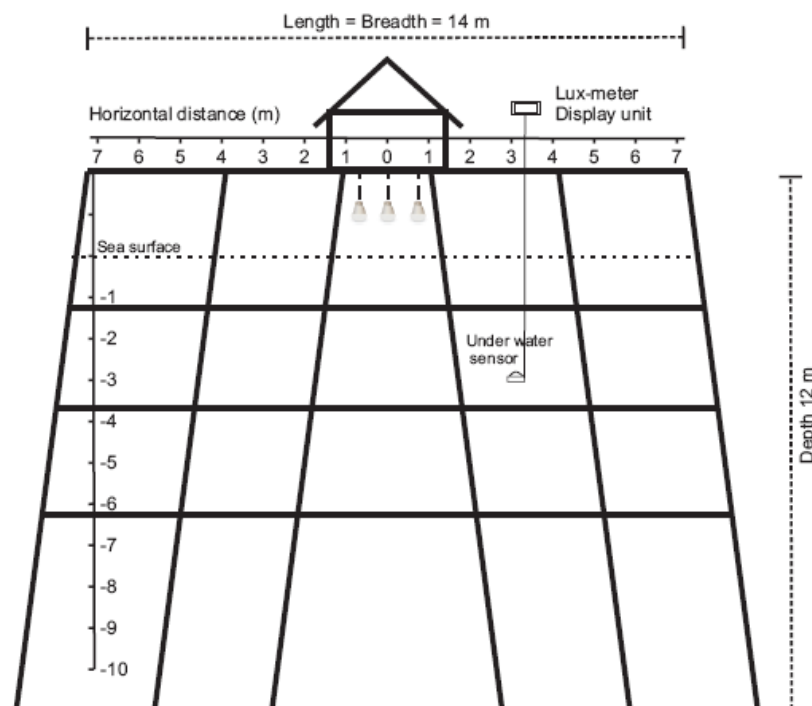


Figure 1. The arrangement of light intensity measurement in sea water.

The first lift net used 6 units of CFL (each lamps is 90 W) and the second bagan used 6 unit LED (each lamps is 30 W) to attract fish schooling into catchable area. The fishing operations were conducted from 7:00 PM to 05:00 AM and the lamps were turned on between 2-4 hours every setting process. The catch data were recorded soon after hauling by sorting the fish based on species, and then weight measured for each species. Fuel consumption of gasoline generator was investigated by adding new fuel using measuring glass every morning after finishing the fishing operation.

Light distribution of LED and CFL lamp in air presented and compared graphically as radar diagram. Luminous intensity of both lamps in sea water shown as graphic of light intensity distribution pattern and describe descriptively. Catch weight (kg) and fuel consumption (l) data were evaluated graphically and

performed by *t*-test analysis ($\alpha = 0.05$). The graphical comparisons of catch weight combined across with fishing trip using total catch, main catch and proportion of main catch that expressed as a percentage of main catch.

Results

Distribution pattern of luminous intensity (lux) of the CFL and LED lamps in the air shows in Figure 2. The light distributions of CFL lamp have main area around the left and right side. Meanwhile the LED lamp has majority of illumination on the bottom of the bulb. The maximum intensity of CFL and LED lamps are 775 lx and 783 lx respectively.

Light illuminances in sea water from CFL and LED lamps have different distribution as shows in Figure 3. The LEDs have higher intensity in surface

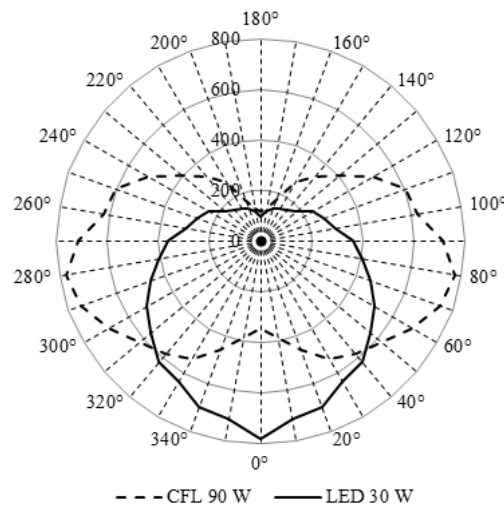


Figure 2. Distribution of light intensity of CFL and LED lamps in the air.

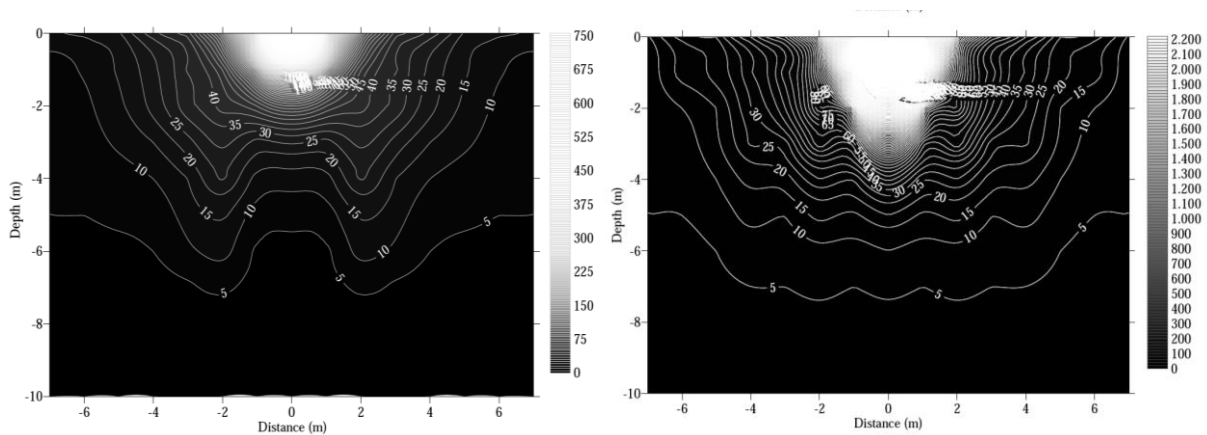


Figure 3. Sea water light distribution of CFL (A) and LED (B) lamps.

water until 5 m deep than CFLs, but the both light source have similar characteristics at 5 to 10 m deep. Light distribution of LED light is more effective and it has homogenous pattern on vertical and horizontal direction. Meanwhile the CFLs are slightly different on vertical, especially on the centre of lift net that have lower intensity than left and right side. The illumination zone for CFL lamps is narrow than LED lamps and it will affect to catchable area on fish capture process.

A total of 120 operations were conducted on 20 days fishing trip by 2 lift net during 22 May-16 June 2015. There was no fishing trips around the full moon (1-5 June) and fixed lift net located in shallow water of Banten Bay less than 15 m deep. The total catch from 2 lift net is 616.57 kg (mean 15.41±0.15 SD). The highest catches is 310.50 kg on lift net that using CFL lamps. The daily catch of CFLs ranged from 6 to 39 kg (mean 15.53±8.94 SD) and LEDs have varied

from 7 to 31 kg (mean 15.30±6.10 SD). Figure 4 shows the daily catch from each lift net during experiment. There are no significant different between the total catch of CFL and LED lamps.

Anchovy (*Stolephorus* sp.) is an economic commodity that becomes main target species of lift net fisheries. Figure 5 shows the daily catch of anchovy during experiment. There are a significant different of catches between LEDs and CFLs on trip 1, 3, 5, 6, 8, 9, 11, 13, 17 and 20, respectively. Lift net with CFL lamps get high catches on trip 8, 10 and 19, meanwhile LEDs have more catches on other fishing trip. The maximum catches of LEDs and CFLs were 15.4 kg (mean 9.82±3.72 SD) and 14.0 kg (mean 8.09±3.11 SD) respectively.

Catch composition during experiment shows the LEDs fixed lift net dominated by *Stolephorus* sp (61.77%), *Sardinella fimbriata* (14.70%), *Leiognathus* sp (14.20%), *Terapon* sp (3.96) and others species

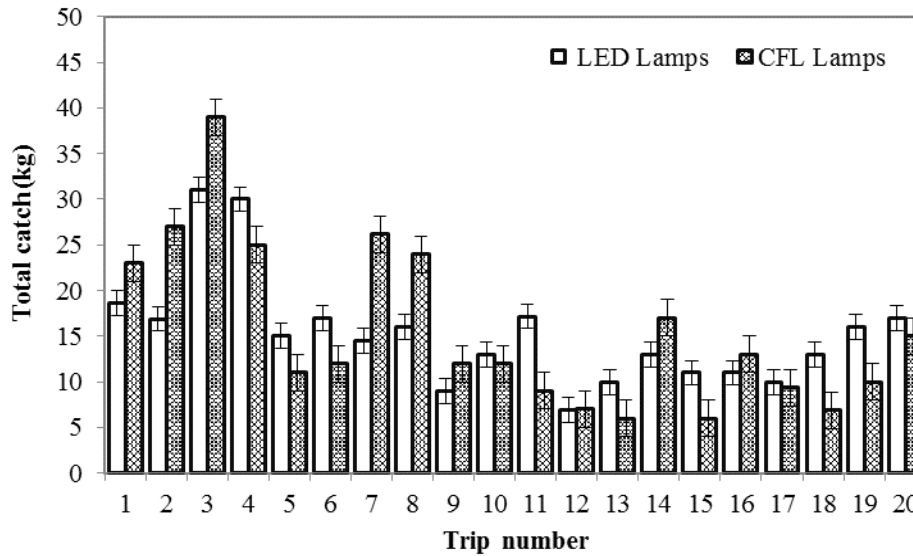


Figure 4. Daily catch of CFLs and LEDs lamps (Vertical lines denote standard errors).

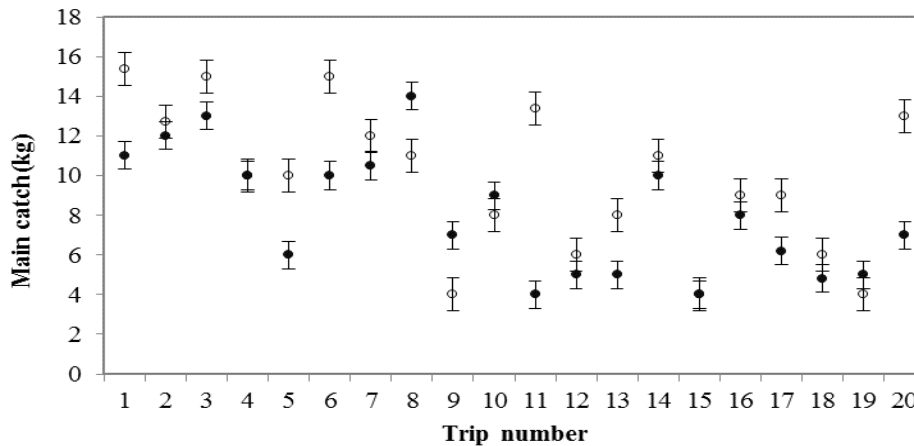


Figure 5. Daily main catches of lift net with LED (circle) and CFL (point) (Vertical lines denote standard errors).

(5.29%). The CFLs catches also dominated by *Stolephorus* sp (59.99%), followed by *Sardinella fimbriata* (22.60%), *Leiognathus* sp (8.18%), *Terapon* sp (5.61) and others species (3.61%). Meanwhile there was no significant difference between daily total catch of each lamp (p-value 0.2218). Figure 6 shows the proportion (%) of catches weight of LED and CFL during fishing operation. There are slightly different of catches between LED and CFL almost on every fishing trip. The application of LED lamps can get 25% to 90% of anchovy (mean 67 ± 21 SD), while CFL lamps produce 33% to 83% (mean 58 ± 14 SD). The field experiment of the LED lamps presented no technical problems, especially for the maintenance and replacing the CFL lamps. Specifically, overall increase of main catches using LED lamps of 29%.

The lift net fishing used gasoline generator as a

main source of electric power. The maximum output of the generator reaches 2,000 W. Duration for lighting in one day trip approximately 10 hours (07:00 AM to 05:00 PM). Fuel consumption of CFL lamps is higher than LED lamps as shows in Figure 7. Fishing operation using LED lamps consumed 3.30 to 5.30 l/night (mean 4.11 ± 0.61 SD), while CFL lamps consumed 5.20 to 7.00 l/night (mean 6.33 ± 0.54 SD). Fuel consumption rate (l/h) under various lamps showed different tendencies. When all the lamps were turn on, lift net with LED lamps consumed 0.33-5.33 l/h for lighting output 180 W and lift net with CFL lamps consumed 0.52-0.70 l/h against 560 W output.

Figure 8 shows the reduction of fuel consumption (%) on lift net operation using LED lamps. Replacing CFL with LED lamps will decrease of fuel consumption during fishing experiment.

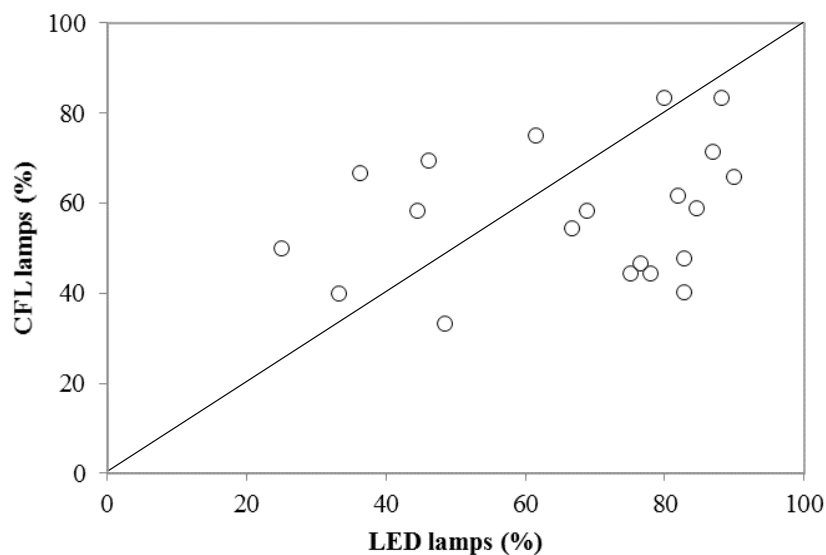


Figure 6. Proportion (%) of lift net main catches using LED lamps plotted against CFL lamps.

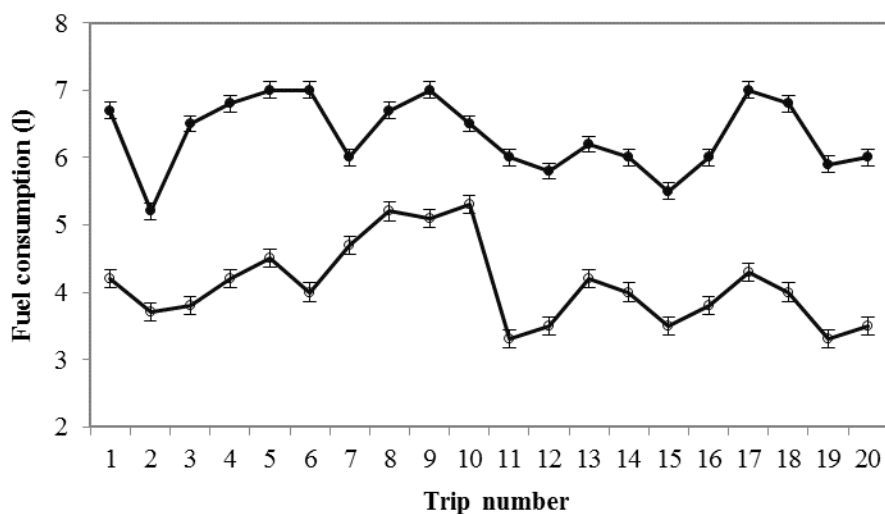


Figure 7. Fuel consumption of lift net using LED (circle) and CFL (point) (Vertical lines denote standard errors).

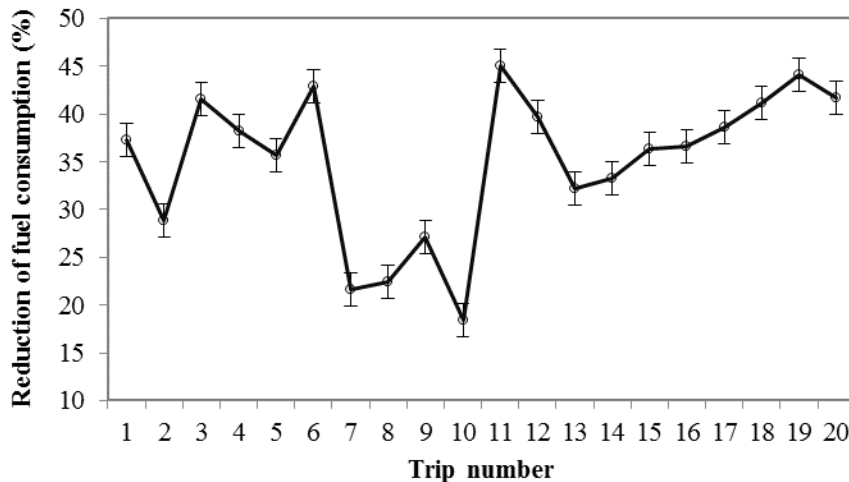


Figure 8. Reduction of fuel consumption of fixed lift net using LED lamps (Vertical lines denote standard errors).

Reduction of fuel consumption ranged from 18% to 45% (mean 35.15 ± 7.76 SD). The LED is an appropriate lamp technology for the lift net fisheries especially to reduce fuel consumption and promote the environmental friendly of small scale fisheries in Banten Bay.

Discussion

The number of fixed lift net in Banten Bay on 2015 reaches 62 units and most of them used CFL lamps to attract target fishes to the catchable area. Fishermen changed their pressurized kerosene lanterns with CFL lamps since 2000 to increase the productivity of lift net fishing operation. The fishers select appropriate CFL lamps based on practical and economic reasons. In this case, low price, easy to used, easy to be obtained, and bright enough are the main consideration that were underlie by local fishermen to select varies of CFL lamps. Nevertheless, application of high output of CFL lamp (up to 90 W per unit) cause increasing of gasoline fuel consumption during fishing operation.

It is evident from Figure 2 that LED produced high intensity at the bottom of lamps (angle 0° - 40° and 320° - 360°). Meanwhile the CFL transmitted high intensity at both side of lamps (angle 60° - 100° and 260° - 310°). There are significant different of light distribution because each lamps have different shape and constructions. The CFL lamp has more surface area at the side (u-tube construction), so these sections have maximum light distribution. Light emitted from the bottom of CFL comes from the bottom side of u-tube that had limited surface area and causes the decreasing of light intensity from the lamp (Puspito *et al.*, 2015). Moreover, light from LED lamp has straight direction especially to the bottom area. LED light sources are highly directional and highly efficient light emitters that can focus the light intensity (Shen *et al.*, 2012). It causes maximum intensity at the bottom of lamps position. The

spectrum, intensity and light distribution of lamps have specific characteristics depends on shape and purpose of lamps manufacture (Anongponyoskun *et al.*, 2011).

Fishermen used iron lamp shade (350 mm diameter) to focus the light during fishing operation. The characteristic of light sources cause different light distribution pattern in sea water, even if it used same lamp shade. LED light distribution had deeper penetration and widely expanded than CFL light. The maximum intensity of LEDs and CFLs at the sea water surface was 2,244 lx and 758 lx respectively on the centre of lift net platform. There were different pattern of iso-lux contour from each lamps at more than 2 m depth. LED light presented U-shape and CFL light have W-shape that decreased with increasing of depth water. It is related to lamps design, construction and light characteristics from each lamp. Light from LED source have sharp distribution and arrives enough at 15 m depth and have no extreme change in spectrum from the surface to 15 m depth sea water (Okamoto *et al.*, 2008). In this research, lift net fishing operation used the general lighting of LED and CFL lamps that was not designed specifically as fishing lamps. Moreover, the light intensity decrease rapidly related to the emergence angle and it distribution varied at target plane. The lens of LED source with novel design using double freeform surface is an effective method to improve uniformity of light illuminance from 67.20% to 86.43% (Wu *et al.*, 2015).

The light illuminance and distribution from both lamps around fixed lift net platform have similar effectiveness to attract fish into catchable area. Mean catch per unit effort in squid jigging fishery using only 216 LED lamps lower than using 78 Metal Halide Lamps, because LED lamps irradiated only a limited area near of vessel (Shikata *et al.*, 2012). Catch weight of boat lift net using flood LED lamps also lower than mercury lamps (Sulaiman *et al.*, 2015). It was indicated the general lighting of LED

lamp cannot be used directly as an effective fishing lamp for capture fisheries. Fish behaviour and response related to light emitted by LED were investigated to improve design and to obtain an appropriate specification of the new generation of fishing lamps for fishing activities (Mills *et al.*, 2014). The new design of white LED lamps using multi-segmented freeform lens (MSFL) can perform better as fishing lamps, 3 times more efficient than the traditional High Intensity Discharge (HID) lamp (Lai *et al.*, 2015).

The anchovy as the main target species of fixed lift net in Banten Bay has high economic value (Indonesia Rupiah/IDR 75,000 – 90,000 per kg/United State Dollar/USD 5.77-6.92 per kg). LED lamp application in this experiment had a significant effect on catch weight of anchovy (p -value 0.0087). It is evident from Figure 5 and 6 that catch weight and proportion of main catch using LED lamps is higher than CFL lamps. Previous researches show varied results of LED performance in fishing operations. Combination of LED panel with 24 metal halide lamps presented the highest catch of Japanese common squid (Yamashita *et al.* 2012). Light from white LED lamp could penetrate to deeper water and caught more white anchovy (*Stolephorus indicus*) than mercury lamps (Sulaiman *et al.*, 2015a). Blue LED was recommended for gathering squid and white LED was very useful for squid fishing (Jeong *et al.*, 2013). Fishing experiment using LED and metal halide lamp in Korean squid jigging fisheries presented that catches of squids per fishing vessel with 1 W LED fishing lamp were higher up to 135.5% than the fishing vessel with metal halide (An, 2014). Main catch (*Stolephorus sp.*) per unit energy of boat lift net in Sulawesi using LED and mercury lamp is 11.61 kg/W and 3.77 kg/W respectively (Sulaiman *et al.*, 2015b).

White LED in this research has dominant wavelengths at 450 nm and 590 nm. It has similar properties with Bae *et al.* (2011) that used the dominant wavelength of white LED at 450 nm and 550 nm to attract *Engraulis japonicus*. Characteristics of fishing lamps will affect catch weight and species composition. It is related to behaviour and response of fish to light attractant. Each species has different maximum absorbance of light spectrum depending on structure and morphology of retinae. *Stolephorus indicus* has a poly-cone type with cone density $684 \times 10^4 \mu\text{m}^2$. It indicates that retinae of this species are very adapted to light stimuli (Heb *et al.*, 2006). *Engraulis japonicus* and *Engraulis encrasicolus* have triple cones with maximum absorbance wavelength approximately at 502 nm, while the short central components were more shortwave sensitive ($\alpha_{\text{max}} = 475 \text{ nm}$). The α_{max} of all long and short cones in the ventro-temporal zone was 492 nm, compared to 502 nm in other retinal regions (Kondrashev *et al.*, 2012). The dominant catch of *Stolephorus sp.* during experiment indicated that transmitted wavelengths from LED lamps were

appropriate enough to the maximum absorbance of anchovy. It is evident that schooling influenced gathering and stay into catchable area for long times as a response of light adaptation behaviour.

LED lamps had lower fuel consumption than CFL during fishing operation. It is evident from Figure 7 and 8 that LED is an efficient light source with a mean saving energy up to 35%. Application of LED lamps in fixed lift net in Banten Bay had a significant effect to reduce fuel consumption (p -value 5.01×10^{-14}). LED fishing lamps in hair-tail angling at Korean fisheries had higher fishing performance, saving 33% of fuel consumption, decreasing operation expenses and greenhouse emissions (An *et al.*, 2012). Fishing experiment at purse seine and squid jigging fisheries showed LED lamps have high productivity and lower fuel consumption than metal halide lamps. LED lamps save 50% of fuel than metal halide (Hua and Xing 2013), more efficient up to 80% than high intensity discharge (Shen *et al.*, 2012) and save 24% of fuel in Japanese squid jigging fisheries (Matshushita *et al.*, 2012). Application of LED lamps in Korean squid jigging industries also decreased 65,163 kl of fuel consumption in a year (Park *et al.*, 2015). In small scale fisheries, replacing CFL lamps with LED lamps saves 37.5% of fuel consumption in fixed lift net at Lesung Cape Banten Province (Arif *et al.*, 2015).

In conclusion, we found the light distribution of commercial LED lamps could penetrate wider and deeper to the catchable area than CFL lamps and were good enough to attract the target species of anchovy. Application of LED lamps had a significant effect on the catch weight of anchovy and saved fuel consumption. LED lamps are the potential suitable light source for replacing CFL lamps and developing sustainable lift net fisheries in Banten Bay.

Acknowledgments

This research was supported by the Ministry of Education and Culture, Republic of Indonesia. We are deeply grateful to Mr. Pendi, a fixed lift net fisherman coordinator, and all the crews of the experimental platform for their cooperation during fishing trials.

References

- An, Y.I. 2014. Fishing efficiency of high capacity (360W) LED fishing lamp for squid *Todarodes pacificus*. Journal of the Korean Society of Fisheries Technology, 50: 326-333. doi: 10.3796/KSFT.2014.50.3.326 (in Korean, with English abstract).
- An, H.C., Bae, B.S., Lee, K.H., Park, S.W., Bae, J.H. 2012. Operating performance of hair-tail angling vessel using the LED and metal halide fishing lamp combination. Journal of the Korean Society of Fisheries Technology, 48: 337-345. doi: 10.3796/KSFT.2012.48.4.337 (in Korean, with English abstract).

- Anongponyoskun, M., Awaiwanont, K., Ananpongsuk, S., Arnupapboon, S. 2011. Comparison of different light spectra in fishing lamps. *Kasetsart Journal Natural Science*, 45: 856-862.
- Arif, A.M., Susanto, A., Irnawati, R. 2015. Konsumsi bahan bakar lampu tabung dan lampu LED pada generator set skala laboratorium (Fuel consumption of tubular lamp and LED lamp in generator set on laboratory scale). *Jurnal Perikanan dan Kelautan*. 5: 25-32 (in Indonesian with English abstract).
- Arakawa, H., Choi, S., Arimoto, T., Nakamura, Y. 1998. Relationship between underwater irradiance and distribution of Japanese common squid under fishing lights of a squid jigging boat. *Fisheries Science*, 64: 553-557.
- Bae, B.S., Cho, S.K., Cha, B.J., Park, S.W., An, H.C. 2011. The study on the Anchovy's (*Engraulis japonicus*) reaction to several light colors in a tank. *Journal of the Korean Society of Fisheries Technology*, 47: 327-337. doi: 10.3796/KSFT.2011.47.4.327 (in Korean, with English abstract).
- Ben-Yami, M. 1976. *Fishing with Light*: FAO Fishing Manuals. Fishing News Book Ltd, England, 121 pp.
- Heb, M., Meizer, R.R., Eser, R., Smola, U. 2006. The structure of anchovy outer retinae (Engraulidae, Clupeiformes) - a comparative light - and electron microscopic study using museum stored material. *Journal of Morphology*, 267: 1356-1380. doi: 10.1002/jmor.10482.
- Hua, L.T. and Xing, J. 2013. Research on LED fishing light. *Research Journal Applied Science, Engineering and Technology*, 5: 4138-4141.
- Inada, H. and Arimoto, T. 2007. Trends on research and development of fishing lighting Japan. *Journal Illuminating Engineering Institute of Japan*. 91: 199-209.
- Jeong, H., Yoo, S., Lee, J., An, Y.I. 2013. The reticular responses of common squid *Todarodes pacificus* for energy efficient fishing lamp using LED. *Renewable Energy*. 54: 101-104. doi: 10.1016/j.renene.2012.08.051
- Kehayias, G., Bouliopoulos, D., Chiotis, N., Koutra, P. 2016. A photovoltaic-battery-LED lamp raft design for purse seine fishery: application in a large Mediterranean Lake. *Fisheries Research*. 177: 18-23. doi: 10.1016/j.fishres.2016.01.003.
- Kondrashev, S.L., Gnyubkina, V.P., Zueva, L.V. 2012. Structure and spectral sensitivity of photoreceptors of two anchovy species: *Engraulis japonicus* and *Engraulis encrasicolus*. *Vision Research*, 68: 19-27. doi: 10.1016/j.visres.2012.07.005
- Lai, M.F., Anh, N.D.G., Gao, J.Z., Ma, H.Y., Lee, H.Y. 2015. Design of multi segmented freeform lens for LED fishing/working lamp with high efficiency. *Applied Optics*. 54: 69-74. doi: 10.1364/AO.54.000E69.
- McHenry, M.P., Doepel, D., Onyango, B.O., Opara, U.L. 2014. Small-scale portable photovoltaic battery-LED systems with submersible LED units to replace kerosene-based artisanal fishing lamps for sub-Saharan African lakes. *Renewable Energy* 62: 276-284. doi: 10.1016/j.renene.2013.07.002.
- Matsushita, Y. and Yamashita, Y. 2012. Effect of a Stepwise lighting method termed "stage reduced lighting" using LED and metal halide fishing lamps in the Japanese common squid jigging fishery. *Fisheries Science*, 78: 977-983. doi: 10.1007/s12562-012-0535-z.
- Matsushita, Y., Azuno, T., Yamashita, Y. 2012. Fuel reduction in coastal squid jigging boats equipped with various combinations of conventional metal halide lamps and low-energy LED panels. *Fisheries Research*. 125-126: 14-19. doi: 10.1016/j.fishres.2012.02.004.
- Mills, E., Gengnagel, T., Wollburg, P. 2014. Solar-LED alternatives to fuel-based lighting for night fishing. *Energy Sustainable Development*. 21: 30-41. doi: 10.1016/j.esd.2014.04.006.
- Okamoto, T., Takahashi, K., Ohsawa, H., Fukuchi, K., Hosogane, K., Kobayashi, S., Moniwa, M., Sasa, K., Yoshino, H., Ishikawa, H., Harada, M., Asakura, K., Ishii, H. 2008. Application of LEDs to fishing lights for Pacific Saury. *Journal of light and Visual Environment*, 32: 38-42.
- Park, J.A., Gardner, C., Jang, Y.-S., Chang, M.-I., Seo, Y.-I., Kim, D.-H. 2015. The economic feasibility of light-emitting diode (LED) lights for The Korean offshore squid-jigging fishery. *Ocean and Coastal Management* 116: 311-317. doi: 10.1016/j.ocecoaman.2015.08.012.
- Puspito, G., Thenu, I.M., Julian, D., Tallo, I. 2015. Utilization of light emitting diode lamp on lift net fishery. *AAFL Bioflux*. 8: 159-167.
- Shen, S.C., Huang, H.J., Chao, C.C., Huang, M.C. 2012. Design and analysis of a high-intensity LED lighting module for underwater illumination. *Applied Ocean Research*. 39: 89-96. doi: 10.1016/j.apor.2012.10.006.
- Shikata, T., Shima, T., Inada, H., Miura, I., Daida, N., Sadayasu, K., Watanabe, T., 2011. Role of shaded area under squid jigging boat formed by shipboard fishing light in the processes of gathering and capturing Japanese common squid, *Todarodes pacificus*. *Nippon Suisan Gakkaishi* 77: 53-60 (in Japanese, with English abstract).
- Shikata, T., Yamashita, K., Shirata, M., Machida, Y. 2012. Performance evaluation fishing lamp using oval-shaped blue LEDs for squid jigging fishery in offshore fishing ground in the Sea of Japan. *Nippon Suisan Gakkaishi*. 78: 1104-1111. (in Japanese, with English abstract).
- Sudirman and Musbir. 2009. Impact of light fishing on sustainable fisheries in Indonesia. *International Symposium on Ocean Science, Technology and Policy of World Ocean Conference*. 2011 May 12-14; Manado, Indonesia. Manado (ID): Hasanuddin University. p 1-11; [downloaded 2015 March 20]. Available at <http://repository.unhas.ac.id/bitstream/handle/123456789/874/PAPER%20WOC%20SUDIR%20UNHAS2009.pdf?sequence=1>
- Sulaiman, M., Baskoro, M.S., Taurusman, A.A., Wisudo, S.H., Yusfiandayani, R. 2015a. Relationship of catching and oceanographic parameters of boat lift net (bagan pete-pete) using mercury lamp and LED lamp. *International Journal of Science: Basic and Applied Research*, 20: 228-239.
- Sulaiman, M., Baskoro, M.S., Taurusman, A.A., Wisudo, S.H., Yusfiandayani, R. 2015b. Perbedaan hasil tangkapan bagan apung yang menggunakan lampu merkuri dengan lampu LED (Comparison of catches boat lift net the use mercury lamps with led lamps). *Jurnal Penelitian Perikanan Indonesia*. 21: 123-130 (in

- Indonesian with English abstract).
- Wisudo, S.H., Sakai, H., Takeda, S., Akiyama, S., Arimoto, T., Takayama, T. 2002. total lumen estimation of fishing lamp by means of rousseau diagram analysis with lux measurement. *Fisheries Science*, 68(sup1): 479-480.
- Wu, H., Zhang, X., Ge, P. 2015. Double freeform surfaces lens design for LED uniform illumination with high distance–height ratio. *Optics and Laser Technology* 73: 66–172. doi: 10.1016/j.optlastec.2015.04.029.
- Yamashita, Y., Matsushita, Y., Azuno, T. 2012. Catch performance of coastal squid jigging boats using LED Panels in combination with metal halide lamps. *Fisheries Research*. 113: 182–189. doi: 10.1016/j.fishres.2011.10.011.